


» Original Twist Cam System



SJC-S

SCREW CAM CLAMP (Single Eye Type)  
Twist Cam Type PAT.

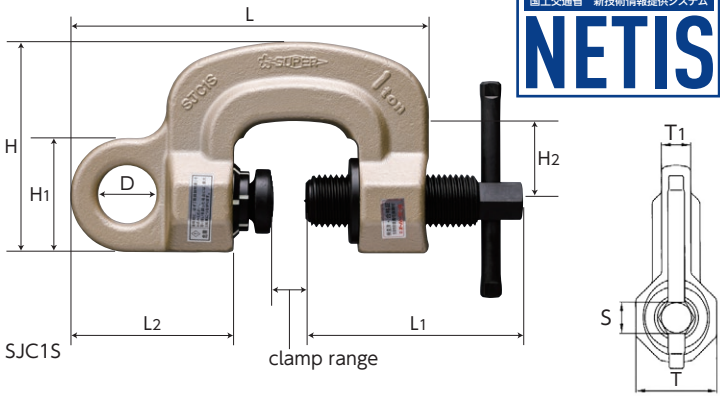


Example of use

⚠ Always lift a load at 2 or more points for safety.  
In case of lifting down, cannot be set to slanted shape part such as steel I beams.

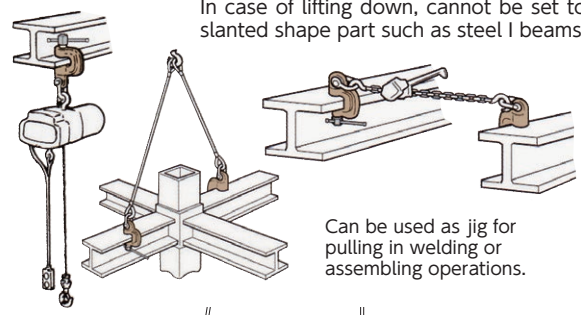

Visual safety check

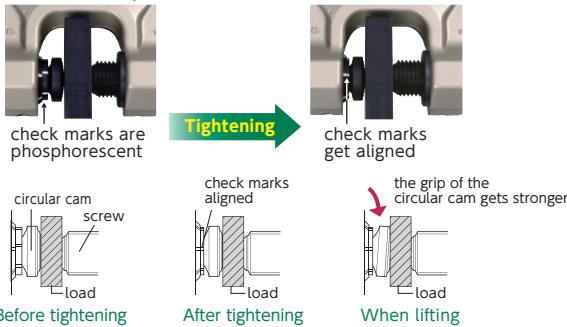

Features

- All-purpose clamp that is especially ideal as lifting piece for chain blocks or hoists.
- The tightening mechanism with a screw and a circular cam (special spring type) provides sure clamping force on a load even when the load is landed or when vibrations occur during the lifting operation.
- High frequency quenching of special alloy steel gives greater toughness and durability.
- The main body has a champagne gold baked-on finish.
- The tightening check marks have phosphorescent (glow in the dark) paint for easy visual recognition.


| Item No. | Rated capacity (ton) | Clamp range (mm) | Size (mm) |     |    |       |    |    |    |    |    |    | N.W. (kg) |
|----------|----------------------|------------------|-----------|-----|----|-------|----|----|----|----|----|----|-----------|
|          |                      |                  | L         | L1  | L2 | H     | H1 | H2 | D  | T  | T1 | S  |           |
| SJC0.5S  | 0.5                  | 0~25             | 158       | 89  | 74 | 107.5 | 49 | 45 | 27 | 44 | 16 | 17 | 1.7       |
| SJC1S    | 1                    | 0~40             | 200       | 121 | 91 | 118.5 | 64 | 45 | 32 | 52 | 18 | 21 | 3.0       |

Note : After having checked that the check marks are aligned, operate tightening over 25N·m (approx. 250kgf·cm).

» Normal Type

SJC

SCREW CAM CLAMP (Single Eye Type)

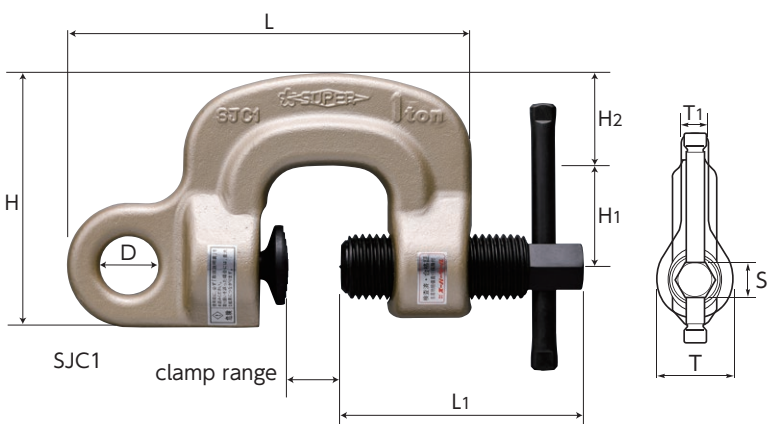

Example of use · Features

\* The features (except the twist cam with check marks) and the examples of use are the same as SJC-S.

| Item No. | Rated capacity (ton) | Clamp range (mm) | Size (mm) |     |       |    |    |    |    |    |    | N.W. (kg) |
|----------|----------------------|------------------|-----------|-----|-------|----|----|----|----|----|----|-----------|
|          |                      |                  | L         | L1  | H     | H1 | H2 | D  | T  | T1 | S  |           |
| SJC0.5   | 0.5                  | 0~25             | 147.5     | 89  | 102.5 | 45 | 35 | 22 | 40 | 14 | 21 | 1.6       |
| SJC1     | 1                    | 0~40             | 182       | 109 | 115   | 45 | 42 | 26 | 46 | 16 | 21 | 2.6       |
| SJC2     | 2                    | 0~40             | 195       | 121 | 137   | 45 | 57 | 36 | 55 | 25 | 21 | 3.8       |
| SJC3     | 3                    | 0~40             | 219.5     | 136 | 155   | 50 | 65 | 45 | 60 | 30 | 21 | 4.8       |

Note : For the torque value of the screw tightening, operate tightening over 25N·m (approx. 250kgf·cm).