


Please contact us for Non-standard dimensions, various surface treatments, JIS, EN and other standards.

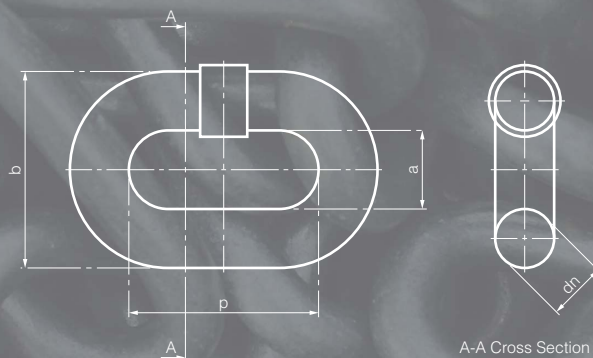

FEC SPEC.CHAIN

Surface hardend chain for electric chain hoist

Type-DT series (GRADE 80)

Material: Alloy steel Elongation: 6% min. Hardness: HV550 min.

Item number	Nominal size (dn) mm	Pitch (p) mm	Inside link width (a) mm	Outside link width (b) mm	Weight per meter kg/m	Working load limit t	Breaking force kN
4012	4	12	5	14	0.35	0.4	20
5015	5	15	6.2	17.5	0.53	0.63	31.5
5617	5.6	17	7.2	19	0.67	0.8	40
6319	6.3	19	8	21	0.86	1	50
7121	7.1	21	9.2	23.8	1.09	1.25	63
8024	8	24	10	28	1.33	1.6	80
9027	9	27	11.3	29.9	1.79	2	100
10030	10	30	12.5	33.2	2.16	2.5	128
11234*1	11.2	34	14.7	37.5	2.68	3.2	160

*1: HV500 min.

*Case-hardened chain **Marking : DT**



Type-DAT series (GRADE 80)

Material: Alloy steel Elongation: 10% min. Hardness: HV500 min.



Item number	Nominal size (dn) mm	Pitch (p) mm	Inside link width (a) mm	Outside link width (b) mm	Weight per meter kg/m	Working load limit t	Breaking force kN
4012	4	12	5	14	0.35	0.4	20
5015	5	15	6.2	17.5	0.53	0.63	31.5
5617	5.6	17	7.2	19	0.67	0.8	40
6319	6.3	19	8	21	0.86	1	50
7121	7.1	21	9.2	23.8	1.09	1.25	63
8024	8	24	10	28	1.33	1.6	80
9027	9	27	11.3	29.9	1.79	2	100
10030	10	30	12.5	33.2	2.16	2.5	128
11234*2	11.2	34	14.7	37.5	2.68	3.2	160

*2: HV450 min.

*Case-hardened chain **Marking : DAT**



Marking (example)

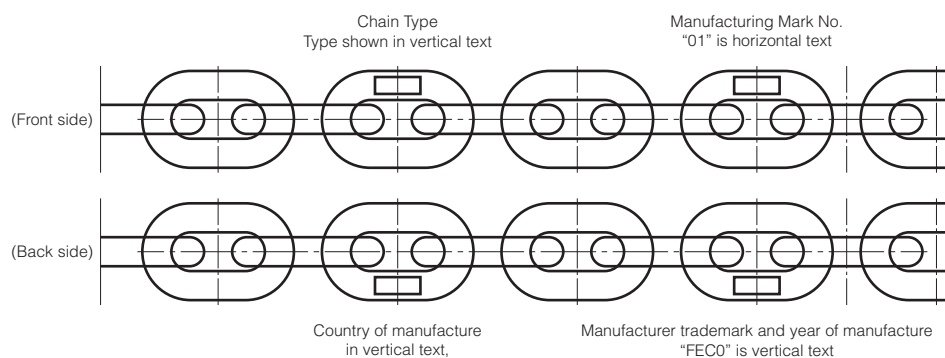

Manufacturing Mark No.
"01" is horizontal text

* Left to right 0 → 1